




106569

28mm PCO (1816) Red PP Tamper Evident Closure with EVA Liner
 K.G. International - sales@kgint.com - +1 305 499-9816

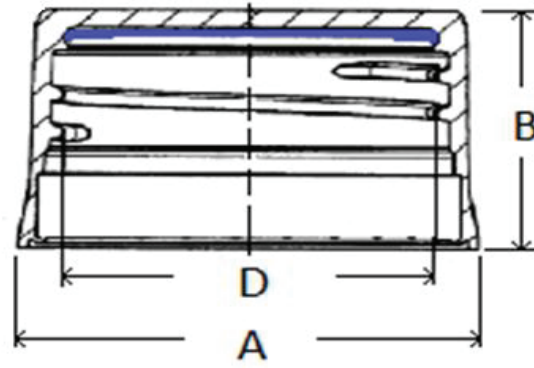

VARIABLE DE CALIDAD / QUALITY VARIABLE	*PRC	UM /MEASURE UNIT	ESPECIFICACIONES/ESPECIFICATIONS		
			MÍNIMO/MINI MUM	ESTÁNDAR/T ARGET	MÁXIMO/MAXI MUM
Diámetro Externo/ Outside Diameter(A)	1	mm	31.60	31.90	32.20
Altura / Height (B)	1	mm	19.80	20.10	20.40
Diámetro Block / Block Diameter	1	mm	25.10	25.20	25.30
Diámetro Interno / Inside Diameter (D)	1	mm	25.60	25.75	25.90
Peso del liner / liner weigth	1	mm	0.20	0.23	0.26
Peso de tapa con liner / Cap with liner weigth	1	mm	2.97	3.10	3.23
Espesor del fondo sin liner / bottom thickness without liner	1	mm	1.40	1.50	1.60
Espesor del fondo con liner / bottom thickness with liner	1	mm	1.58	1.73	1.88
Espesor liner periferia / Perifery liner thickness	1	mm	0.45	0.50	0.55
Planaridad / Flatness	1	mm	-30.00	0.00	20.00
Peso de tapa sin liner / cap without liner weigth	1	g	2.77	2.87	2.97
Ruptura de puente / Bridge Breaking	1	lb/pulg	4	8	12
Fuga Dinámica / Dynamic Leaking	1	psi/1 min.	150	165	180
Torque de cierre estático / Static torque	1	lb/pulg	18	20	22
Torque de apertura inmediato / Initial removal torque	1	lb/pulg	9	14	20
Impacto de bala / Bullet impact	1	n/a	pasa/no pasa		
Rigidéz / rigidity	2	n/a	pasa/no pasa		
Adhesividad / adhesiveness	2	n/a	pasa/no pasa		
Hidrostática / Hydrostatics	2	n/a	pasa/no pasa		
Visual centro / Visual center	2	n/a	pasa/no pasa		
Visual color / Visual color	2	n/a	pasa/no pasa		