




# 106647

28mm PCO (1816) Black HDPE Tamper Evident Closure (Unlined)

K.G. International - sales@kgint.com - +1 305 499-9816

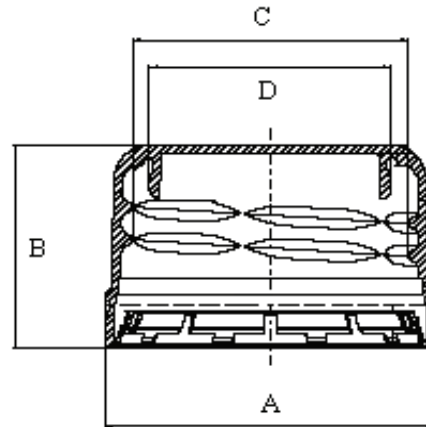

VARIABLE DE CALIDAD / QUALITY VARIABLE	*PRC	UM /MEASURE UNIT	ESPECIFICACIONES/ESPECIFICATIONS		
			MÍNIMO/MINI MUM	ESTÁNDAR/T ARGET	MÁXIMO/MAXI MUM
Diámetro Externo/ Outside Diameter(A)	1	mm	30.40	30.70	31.00
Altura / Height (B)	1	mm	19.50	19.80	20.10
Diámetro Interno / Inside Diameter (C)	1	mm	25.45	25.60	25.75
Diámetro Block / Block Diameter ( D )	1	mm	22.35	22.50	22.65
Peso de tapa sin liner / cap without liner weigth	1	g	2.25	2.30	2.35
Espesor del fondo sin liner / bottom thickness without liner	1	mm	0.70	0.80	0.90
Planaridad / Flatness	1	mm	-30.00	0.00	20.00
Ruptura de puente / Bridge Breaking	1	lb/pulg	4.00	8.00	12.00
Fuga Dinámica / Dynamic Leaking	1	psi/1 min.	15.00	30.00	45.00
Torque de cierre estático / Static torque	1	lb/pulg	18.00	20.00	22.00
Torque de apertura inmediato / Initial removal torque	1	lb/pulg	9.00	14.00	20.00
Adhesividad / adhesiveness	2	n/a	pasa/no pasa		
Hidrostática / Hydrostatics	2	n/a	pasa/no pasa		
Visual centro / Visual center	2	n/a	pasa/no pasa		
Visual color / Visual color	2	n/a	pasa/no pasa		